





## SERIES LD 600 SLAB WIDTH GAUGES

- **Width determined via Laser Measurement and Auto Calibration CPU**
- **Model Options with Laser Distance Meters or Laser Triangulation Meters**
- **Width Gauges for hot and cold product**
- **High temperature versions for slabs at 1350°C**
- **Lasers mount safely away from side of line**
- **All widths of slab/ bloom accommodated**
- **Width measurement according to Model: 0.5 mm to 5 mm accuracy**
- **Auto calibration Bar provided**
- **Robust Secondary Enclosure Water Cooled with Air Purging.**

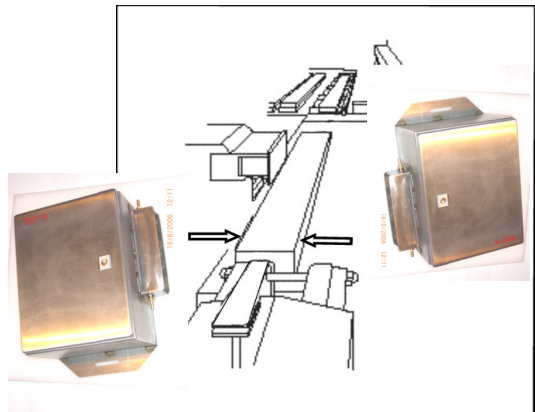

Extendable Calibration Bar



Gauge CPU

### Gauge Performances

Gauge Model	LD600-LT2S	LD600-LT2H HT	LD600-ELD10	LD600-HD20 HT	LD600-1150 HT	LD600-1950 HT	LD6003000 HT
Laser Heads Range (mtrs)	0.3 to 10	0.3 to 10	0.3 to 4	0.3 to 20	0.7 to 1.6	1.5 to 2.4	2.0 to 4.0
Width Variation Limit (mtrs)	All sizes	All sizes	All sizes	All sizes	1.75	1.75	3.95
Width Repeatability (mm)	+4	+4	+3	+8	0.5 mm	+/- 1.0 mm	+/- 1.5 mm
Product Temperature Limit	750 deg C	1100 deg C	750 deg C	1300 deg C	1250 deg C	1250 deg C	1250 deg C
Measurement Technique	LDM	LDM	LDM	LDM	LTM	LTM	LTM
Laser Class	II	II	I	1	II	II	II

### General Description

The Series LD600 family of Width Gauges comprise various Model Gauges utilizing either time of flight Laser Distance Meters (LDMs) or Laser Triangulation Meters (LTM) for determining the slab or Bloom width according to the clients accuracy requirements and Mill layout restraints.

In each case the Laser measuring heads are provided pre-mounted in robust secondary stainless enclosures with water cooling and air purging to enable them to be mounted securely on each side of the line in the harshest of environments. The selection and positioning of the Laser Heads is determined by the slab width dimensions and the clients accuracy requirements. The wide variety of Gauges available allow the selection of the correct Width Gauge without compromise according to accuracy requirements, variation in slab width and its temperature.

The Gauge CPU displays the determined distance from each Laser and calculated slab width as well as providing these values as RS422 Interface for connection to clients PC. A keypad is also provided to enable via a user friendly menu programming of the Gauge with regard the location of the Laser measuring heads and any offset required. An extendable calibration bar is available that is suspended between the line rollers as well as Auto calibration feature in that on inserting this master the gauge by single button input is zeroed to this master. The gauge determines slab width by synchronized measurement by both laser heads via moving average with any multiple false readings generated from surface texture removed. The Laser head temperatures are continuously monitored. Measure enable relay input and system healthy relay output relays are provided

**MODULOC<sup>®</sup> Technology - Lasers for Precise Product Measurement**

**MODULOC<sup>®</sup> Control Systems Ltd.**

Wheatthamstead, Hertfordshire, AL4 8SB United Kingdom  
 Phone: +44 (0)845 873 6501 FAX: +44 (0)158 283 1980  
 E-Mail: sales@moduloc-intl.com Website: www.moduloc-intl.com

**MODULOC<sup>®</sup> Control Systems, Inc.**

2808 Broadway Blvd. - Suite 201B, Monroeville, PA 15146 USA  
 Phone: 412-824-1260 FAX: 412-824-8890  
 E-Mail: sales@moduloc-usa.com Website: www.moduloc-usa.com